WORLD INTELLECTUAL PROPERTY: ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04R 1/34, G06F 1/16

(11) International Publication Number:

WO 98/43464

110-11 110-1, 0001 110

(43) International Publication Date:

1 October 1998 (01.10.98)

(21) International Application Number:

PCT/GB98/00834

A1

(22) International Filing Date:

19 March 1998 (19.03.98)

(30) Priority Data:

9705981.0

22 March 1997 (22.03.97)

GB

(71) Applicant (for all designated States except US): NEW TRANS-DUCERS LIMITED [GB/GB]; Stonehill, Huntingdon, Cambridgeshire PE18 6ED (GB).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB];
 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT
 (GB). COLLOMS, Martin [GB/GB]; 22 Burgess Hill,
 London NW2 2DA (GB). CROCKER, Norman [GB/GB]; 70
 Townsend Lane, Harpenden, Hertfordshire AL5 2RG (GB).
 ROBERTS, Martin [GB/GB]; 17 Home Farm Lane, Bury
 St. Edmunds, Suffolk IP3 2QJ (GB).
- (74) Agent: MAGUIRE BOSS; 5 Crown Street, St. Ives, Cambridgeshire PE17 4EB (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: PERSONAL COMPUTING DEVICES COMPRISING A RESONANT PANEL LOUDSPEAKER

(57) Abstract

The invention is a lap-top computer (128) or the like personal computing device having a body (137) comprising a keyboard (138) and a lid (130) hinged to the body and comprising a display screen (129) characterised by a resonant panel loudspeaker, preferably a distributed mode acoustic radiator loudspeaker, in or attached to the lid, and an acoustic waveguide or horn (167, 168) directing an acoustic output from the loudspeaker in a desired direction.

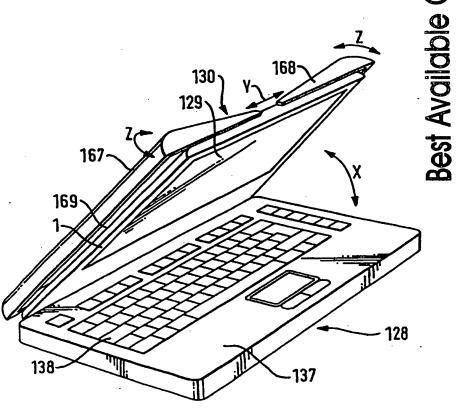

.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

ŀ							• •
AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	11	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	
СН	Switzerland	KG	Kyrgyzstan	NO	Norway		Yugoslavia
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand	ZW	Zimbabwe
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT			
CU	Cuba	KZ	Kazakstan	RO	Portugal Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE .			
EE	Estonia	LR	Liberia		Sweden		
		LK	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

Inter onal Application No

A. CLAS	SIFICATION OF SUBJECT MATTER		PC1/GB 98/00834
IPC 6	H04R1/34 G06F1/16		
According	to International Patent Classification(IPC) or to both national	dassification and IPC	
B. FIELDS	S SEARCHED		
IPC 6	documentation searched (classification system followed by classification s	assification symbols)	
	ation searched other than minimum documentation to the exte		
Electonic	data base consulted during the international search (name of	data base and, where practical,	search terms used)
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate. of	the relevant passages	Relevant to claim No.
Y	WO 97 09854 A (VERITY GROUP F HENRY (GB); COLLOMS MARTIN (G NE) 13 March 1997	PLC ;AZIMA GB); HARRIS	1,2,5-7, 9,13-15
	see page 4, line 1 - line 7 see page 11, line 9 - page 12 claims 1,2,5,7,8; figure 3		
Y	EP 0 700 210 A (TOKYO SHIBAUR CO) 6 March 1996 see column 5, line 5 — column figures 1-4		1,2,5-7, 9,13-15
Υ	WO 96 20576 A (PHILIPS ELECTR ;PHILIPS NORDEN AB (SE)) 4 Ju see page 4, line 20 - page 7, figures 1-7	lv 1006	1,2,5-7, 9,13-15
		-/	
	er documents are listed in the continuation of box C.	X Patent family me	mbers are listed in annex.
A" documen consider	egories of cited documents : It defining the general state of the art which is not red to be of particular relevance		hed after the international filing date lot in conflict with the application but the principle or theory underlying the
earlier do filing dat document	cument but published on or after the international te	"X" document of particular	r relevance; the claimed invention
citation	creat to establish the publication date of another or other special reason (as specified) t referring to an oral disclosure, use, exhibition or	"Y" document of particular cannot be considered document is combined	step when the document is taken alone relevance; the claimed invention d to involve an inventive step when the d with one or more other such docu-
document	t published prior to the international filing date but n the priority date claimed	ments, such combina in the art. "&" document member of	tuon being obvious to a person skilled
ate of the act	tual completion of theinternational search		international search report
9 (June 1998	26/06/199	98
ame and mai	iling address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk	Authorized officer	
	Tel. (+31-70) 340-3016 Fax: (+31-70) 340-3016	Nieuwenhu	is, P

1

INTERNATIONAL SEARCH REPORT

Inte. ional Application No PCT/GB 98/00834

	MIGH) DOCUMENTS CONSIDERED TO BE RELEVANT	7 40 3	8/00834
Category *	Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.
•	PATENT ABSTRACTS OF JAPAN vol. 011, no. 117 (E-498), 11 April 1987 & JP 61 264897 A (MITSUBISHI ELECTRIC CORP), 22 November 1986, see abstract	1,2,5-7, 9,13-15	
',Υ	GB 2 310 559 A (NOKIA MOBILE PHONES LTD) 27 August 1997 see abstract; figure 4		
			÷

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter Snal Application No PCT/GB 98/00834

Patent docume			FC1/GB 98/00834			
Patent document cited in search report		Publication date	Patent tamity member(s)		Publication date	
WO 9709854	Α	13-03-1997	AU	6880196 A	27 02 100	
			AU	6880296 A	27-03-199	
			AU	6880396 A	27-03-1997	
			AU	6880496 A	27-03-1997	
			AU	6880596 A	27-03-1997	
			AU	6880696 A	27-03-1997	
		•	AU		27-03-1997	
			AU	6880796 A	27-03-1997	
			AU	6880896 A	27-03-1997	
4		,		6880996 A	27-03-1997	
			AU	6881096 A	27-03-1997	
			AU	6881296 A	27-03-1997	
			AU	6881396 A	27-03-1997	
			AU	6881496 A	27-03-1997	
			AU	6881596 A	27-03-1997	
-			AU	6881696 A	27-03-1997	
			AU	6881896 A	27-03-1997	
			AU	6881996 A	27-03-1997	
			AU	6882096 A	27-03-1997	
•		•	AU	6882196 A	27-03-1997	
			AU	6882296 A	27-03-1997	
			AU	6882396 A	27-03-1997	
·		•	WO	9709853 A	13-03-1997	
			WO	9709840 A	13-03-1997	
			WO	9709841 A	13-03-1997	
			WO	9709842 A	13-03-1997	
			WO	9709855 A	13-03-1997	
			WO	9709856 A	13-03-1997	
			WO	9709858 A	13-03-1997	
EP 0700210	Α	06-03-1996	JP	8079659 A	22-03-1996	
*			CN	1125378 A	26-06-1996	
			DE	700210 T	29-08-1996	
			US	5710394 A	20-01-1998	
WO 9620576	Α	04-07-1996	EP	0746958 A	11-12-1996	
			JP	9509817 T	30-09-1997	
			US	5737435 A	07-04-1998.	
GB 2310559	Α	27-08-1997	NONE			

5 PERSONAL COMPUTING DEVICES COMPRISING A RESONANT PANEL LOUDSPEAKER

10

DESCRIPTION

15

TECHNICAL FIELD

The invention relates to personal computing devices and more particularly to lap-top and the like portable personal computers, e.g. so-called note-book computers and portable personal telephones incorporating loudspeakers.

20

25

BACKGROUND ART

Embodiments of the present invention use members of nature, structure and configuration achievable generally and/or specifically by implementing teachings of our International application WO97/09842. Such members thus have capability to sustain and propagate input vibrational energy by bending waves in operative area(s) extending transversely of thickness often but not necessarily to edges of the member(s); are configured with or without

anisotropy of bending stiffness to have resonant mode vibration components distributed over said area(s) beneficially for acoustic coupling with ambient air; and have predetermined preferential locations or sites within said area for exciter means, particularly operationally active or moving part(s) thereof effective in relation to acoustic vibrational activity in said area(s) and signals, usually electrical, corresponding to acoustic content of such vibrational activity.

Members as above are herein called distributed mode acoustic radiators and are intended to be characterised as in the above PCT application and/or otherwise as specifically provided herein.

This invention is particularly concerned with acoustic

devices in the form of loudspeakers for personal computing
devices, and with personal computing devices incorporating
such loudspeakers.

DISCLOSURE OF INVENTION

The present invention is a lap-top or the like portable computing device having a body comprising a 20 keyboard and a lid hinged to the body and comprising a display screen, characterised by a resonant loudspeaker. preferably a distributed mode radiator loudspeaker, in or attached to the lid, and an acoustic waveguide or horn directing an acoustic output - 25 from the loudspeaker in a desired direction. The desired direction will normally be towards the user of the portable computing device.

15

The waveguide or horn may comprise a member movably mounted on the lid, e.g. for pivoting and/or sliding movement, from a closed or retracted position to an advanced or open position. An opposed pair of the waveguides or horns may be provided, e.g. to provide multichannel acoustic output. The waveguide(s) or horn(s) may comprise a plate-like member hinged to the lid.

The lid may be provided with one or more acoustically transparent apertures in its outer surface.

BRIEF DESCRIPTION OF DRAWINGS

The invention is diagrammatically illustrated, by way of example, in the accompanying drawings, in which:-

Figure 1 is a front perspective view of a first embodiment of lap-top computer according to the present invention;

Figure 2 is a cross-sectional view of the lid of the laptop computer;

Figures 2a and 2b are respective enlarged scrap crosssectional side views of alternative details in the 20 embodiment of Figures 1 and 2;

Figure 3 is a front perspective view of a second embodiment of laptop computer;

Figure 3a is a plan view of the lid of the laptop computer of Figure 3;

25 Figure 4 is a front perspective view of a third embodiment of laptop computer;

Figure 5 is a front perspective view of an embodiment of electronic personal organiser;

Pigures 5a and 5b are respective enlarged scrap crosssectional side views of alternative details of the embodiment of Figure 5, and

Figure 6 is a rear perspective view of the embodiment 5 shown in Figure 5.

BEST MODES FOR CARRYING OUT THE INVENTION

Figures 1, 2 and 2a illustrate a lap-top personal computer (128) having a body (137) comprising a keyboard (138) and a lid (130) having a rectangular frame (1), e.g. of moulded plastics, supporting a visual display screen (129) and which lid is hinged to the body for movement as indicated by arrow X, between a folded position in which the lid encloses the keyboard and an erect position in which the lid is substantially upright.

The lid (130) houses an opposed pair of loudspeakers

to adapt the computer for multi-media applications and the
like, the loudspeakers each comprising a thin rectangular
panel (2) forming a multi-mode acoustic radiator of the
kind described in W097/09842. Each loudspeaker panel (2)
has a monolithic structure and is supported near to its

periphery on discrete resilient suspension elements (3)
e.g. of an elastomeric material, which in turn are
supported on the surrounding frame (1) via the display
screen (129). A vibration exciter (9) is mounted on each
panel at a predetermined position as discussed more fully
in our International application W097/09842, to launch
bending waves into each of the panels (2) to cause them to
resonate to produce acoustic outputs. The exciters may be

electrodynamic.

The lid (130) comprises an opposed pair of cover members (167,168) which together define the outer casing of the lid and are each shaped as a flat rectangular panel having a downturned peripheral rim extending round three adjacent sides, the fourth side being arranged to abut against the corresponding side of the opposite cover member. The cover members slide and hinge on the frame (1) in the directions indicated by arrows Y and Z respectively such that when extended from the closed position indicated at the left-hand side in Figure 2 to their operative position indicated in Figure 1 and the right-hand side in Figure 2, they are locked by friction or other means to form acoustic waveguides or horn structures whose apertures 15 (169) are presented to the opposite sides of the lid. horn expansion effectively begins over the region of the loudspeakers. The diffuse sound energy and nearly constant power with frequency of the loudspeakers means that relatively good matching is achieved between the horn and the speaker elements. Benefits include relatively high acoustic efficiency, improved low range response and a sound directivity which is beneficially directed towards the user with reduced leakage towards others. The relatively small effective acoustic sources represented by 25 the horn apertures (169) also will improve the sense of stereo image localisation for the user.

It might also be possible to incorporate the multimode speaker units in the lid cover members (167,168) where the radiation may then either be bi-directional and/or forwards directed <u>via</u> the horn structure.

As shown in Figure 2b it is possible to render the cover members (167,168) acoustically transparent by providing apertures (170) therein, the apertures being coverable by a sliding grille (17) to allow sound from the speaker to exit, or alternatively acoustically opaque when the grille is moved to cover the apertures, to direct the sound through and only through the horn element. The sliding grille would allow the user to open, or partially open and close the apertures to control the degree or mix of the horn effective component and the direct sound emitted via the grille.

Figures 3 and 3a show a second embodiment of laptop computer which is generally similar to that described above 15 with reference to Figures 1 and 2. However the complexity of the waveguide or horn mechanism is simplified, as compared to the embodiment of Figure 1 and 2 so that opposed horn/waveguide elements are provided by the wedge shapes formed between flat plate elements (40) hinged by 20 hinges (34)to the outer surface of a conventional lid (131) and the lid itself. In this embodiment, the elements (40) are or comprise multi-mode acoustic radiators of the kind described in WO97/09842 and excited by vibration exciters (9) mounted thereon. 25 hinges (34) may have friction or detent action to allow both predetermined and/or user-preferred angles for the waveguide elements. Additionally the lid casing itself may

be adapted to resonate according to distributed mode principles by control of effective area geometry and exciter position.

The embodiment of Figure 4 is generally similar to 5 that of Figure 3, but in this case, the generally conventional lid case (131) of the laptop computer is provided with a single plate-like cover (40) hinged to the body (137), to form a wedge-shaped cavity to provide horn-like loading for a multi-mode speaker (2) located within the cover.

The plate-like cover (40) is formed with a rectangular frame (41) supporting a distributed mode acoustic radiator panel (2) which may be bi-directional or forwards directed according to the required acoustic efficiency and desired use. This plate-like cover may be single or multi-channel according to the properties of the plate and the location and number of exciters. Distributed mode speaker panels lend themselves to activation by multiple exciters due to the non-pistonic bending wave operation.

In the embodiment of Figures 5 and 6, the concept of the acoustic wave guide as described above is applied to distributed mode speaker(s) in the lid (150) of a personal digital assistant or personal data unit (158). The device (158) is generally similar to the laptop computer described above and comprises a body (157) having a keyboard (156) and a lid (150) hinged to the body and incorporating a visual display screen (129). The lid construction is similar to that described above with reference to Figures

2 and 2a or 2b, as indicated in Figures 5a and 5b, with the exception that in the present case the lid cover (155) is a fixed structure having a plate-like surface surrounded by a downturned peripheral lip and which carries a frame (1) supporting the display screen (129) with a resonant panel 5 loudspeaker (2,9) resiliently mounted thereon. A pair of slots (159) are defined between opposite sides of the visual display screen (129) and the cover (155) which are coupled to an acoustic channel leading to the loudspeaker 10 region and which directs sound towards the user. Optionally as shown in Figures 5b and 6, the lid casing may be perforated at (170) to allow sound to be radiated from the rear section, under the control of a movable grille The diffuse radiation characteristic and bidirectional nature of the distributed mode speaker lends itself to the effectiveness of this application in the suggested mode of operation.

Where a personal data unit has audio modes of operation or may be combined with or associated with a 20 mobile telephone, the relatively large distributed modetype speaker installed in the lid provides a means for hands free communication and also will be effective for loudspeaking tele-conferencing.

The lid cover (155) may also be designed as an 25 integrated distributed mode speaker or speakers if desired.


CLAIMS


- 1. A personal computing device having a body comprising a keyboard and a lid comprising a display screen hinged to the body to cover the keyboard, characterised by a resonant panel loudspeaker in or attached to the lid, and an acoustic waveguide or horn to direct acoustic output from the loudspeaker.
- A personal computing device according to claim 1, characterised in that the waveguide or horn comprises a
 member mounted on the lid.
 - 3. A personal computing device according to claim 2, characterised in that the member is movably mounted on the lid from a closed or retracted position to an advanced or open position.
- 15 4. A personal computing device according to claim 2 or claim 3, characterised in that the member forms a lid cover.
 - 5. A personal computing device according to any preceding claim, characterised in that the loudspeaker panel is supported in the lid by means of a resilient suspension.
 - 6. A personal computing device according to claim 5, characterised by a frame surrounding the panel and on which the panel is suspended.
- 7. A personal computing device according to claim 6,
 25 characterised in that the display screen is supported on the frame and in that the loudspeaker panel is resiliently supported on the display screen.
 - 8. A personal computing device according to any one of

.


claims 2 to 7, wherein the cover is or comprises a resonant panel loudspeaker.


- 9. A personal computing device according to any preceding claim, characterised by an opposed pair of the waveguides or horns.
- 10. A personal computing device according to any preceding claim, characterised in that the waveguide or horn comprises a plate-like member hinged to the lid.
- 11. A personal computing device according to any preceding
- 10 claim, characterised in that the lid is provided with one or more acoustically transparent apertures.
 - 12. A personal computing device according to claim 11, characterised by a movable grille to adjust acoustic output through the apertures.
- 13. A personal computing device according to any preceding claim, characterised in that the resonant panel loudspeaker is integral with the lid.
 - 14. A personal computing device according to any preceding claim, characterised in that the resonant panel loudspeaker
- 20 comprises a stiff lightweight panel having a monolithic structure.
 - 15. A personal computing device according to any preceding claim, characterised in that the resonant panel loudspeaker is a distributed mode acoustic radiator.

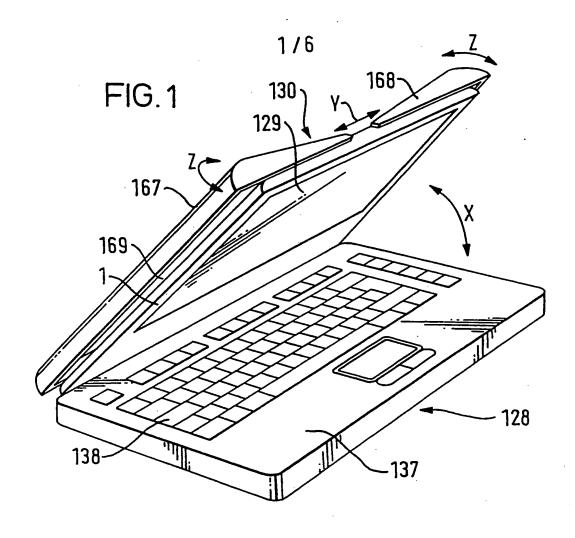


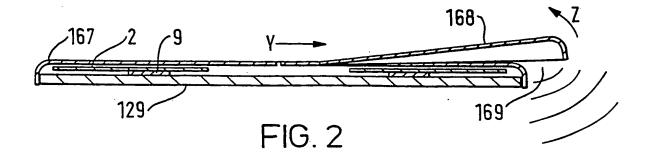


2/6

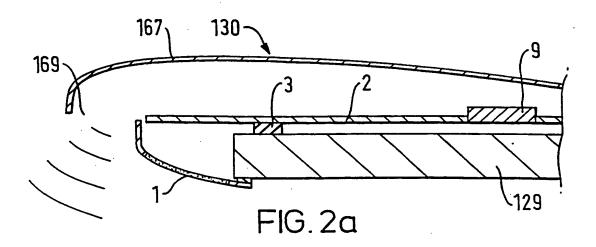

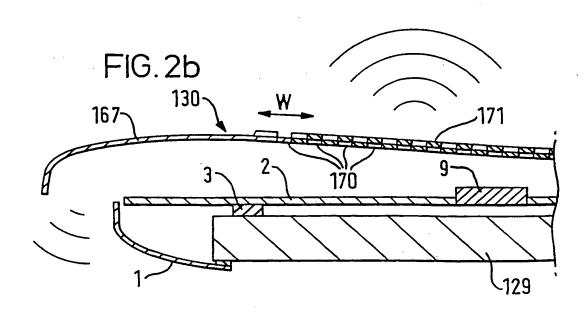

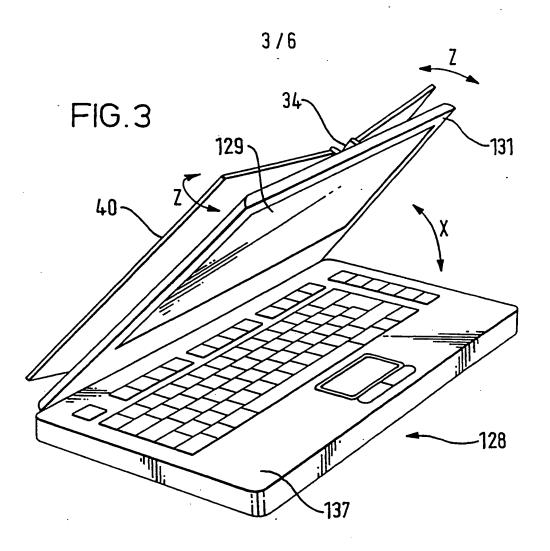

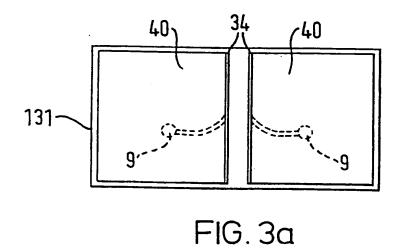

4/6





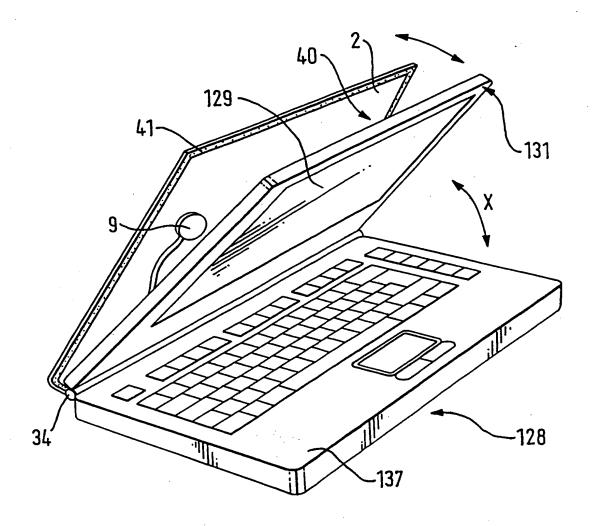


FIG.4

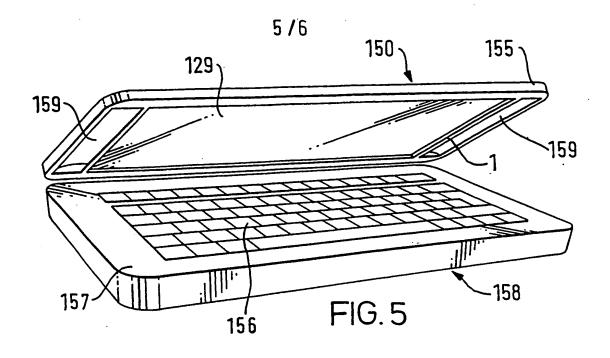

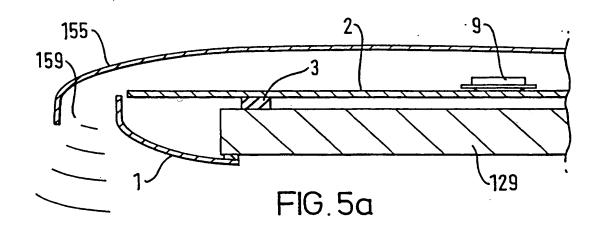

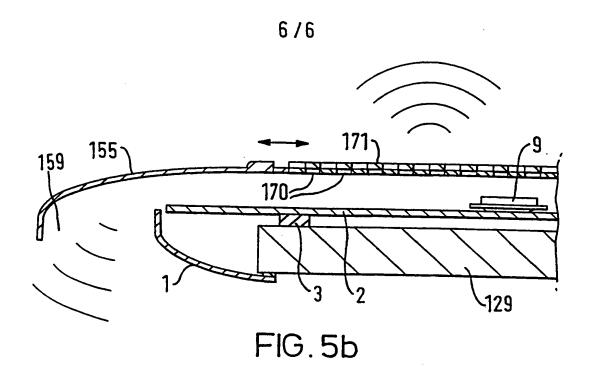

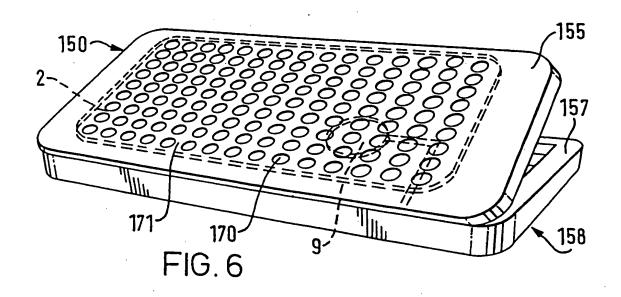

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
□ other:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.